

Split pull-down door, tall chamber utensil / pot washer



Accessories not included



- **Soft touch electronic** control panel with 3 cycles (2,4 & 6mins) and self diagnostics
- **Double skinned chamber** construction with covered corners for easy cleaning
- **3 spoke** stainless steel top and bottom wash arms for maximum wash chamber coverage and superior wash results
- **Low rinse volume** - guaranteed rinse water pressure - rinse pressure pump included
- **Usable chamber height of 850mm**
- **Deep** drawn single sheet wash tank with covered corners for easy cleaning and durability
- **1.4kW wash pump** for efficient high pressure water recirculation and superior wash performance
- Wash pump inlet strainer to ensure machine reliability
- **Full width wash tank strainers** with secondary wash pump intake strainer for maximum reliability
- Includes fill hose and power lead for quick and easy installation
- Chemical dispensers and pump-out drain available as optional kits
- Includes 1 x stainless steel mesh basket - size 550x610mm, 1 flat rack & 1 stainless steel baking sheet / gastronorm pan support rack
- Back flow prevention device as standard to meet Watermark Approval and ATS 5200.101

Technical Data

1. drain connection—optional pump out drain hose shown	Waste connection point - 50mm
2. fresh water connection: pressure hose 1000mm flow pressure water temperature	Connection size: 3/4" BSP 200-400kPa 55-65°C
3. power cord	3 phase - no plug
4. hose for detergent hose for rinse aid	Available as optional kits
cycle times	2 minutes 4 minutes 6 minutes
water consumption	3.5 litres
tank capacity	37 litres
tank heating	3kW
power supply	415/50/3NE
booster loading	6kW
total loading	8kW
pump capacity	2kW
loading height	850mm
Machine width	710mm

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.

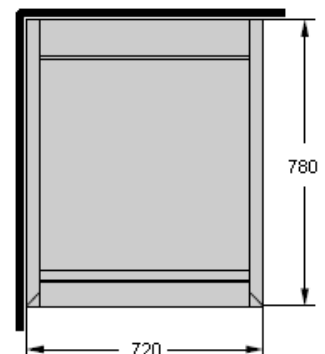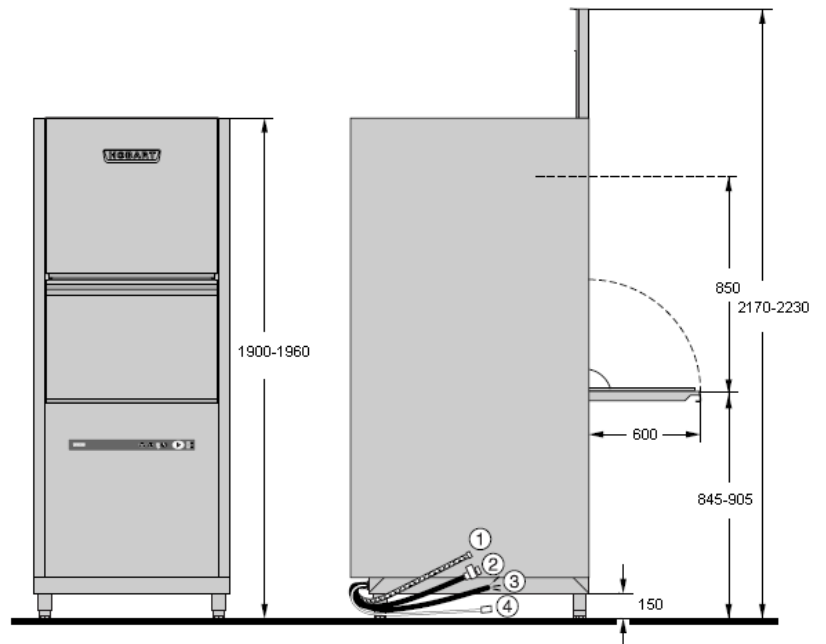

①		ø50 mm
②		ø 3/4" ss hose
③		415/50/3N&E