


Twin Front Loading Utensil Washer

UXT-10A

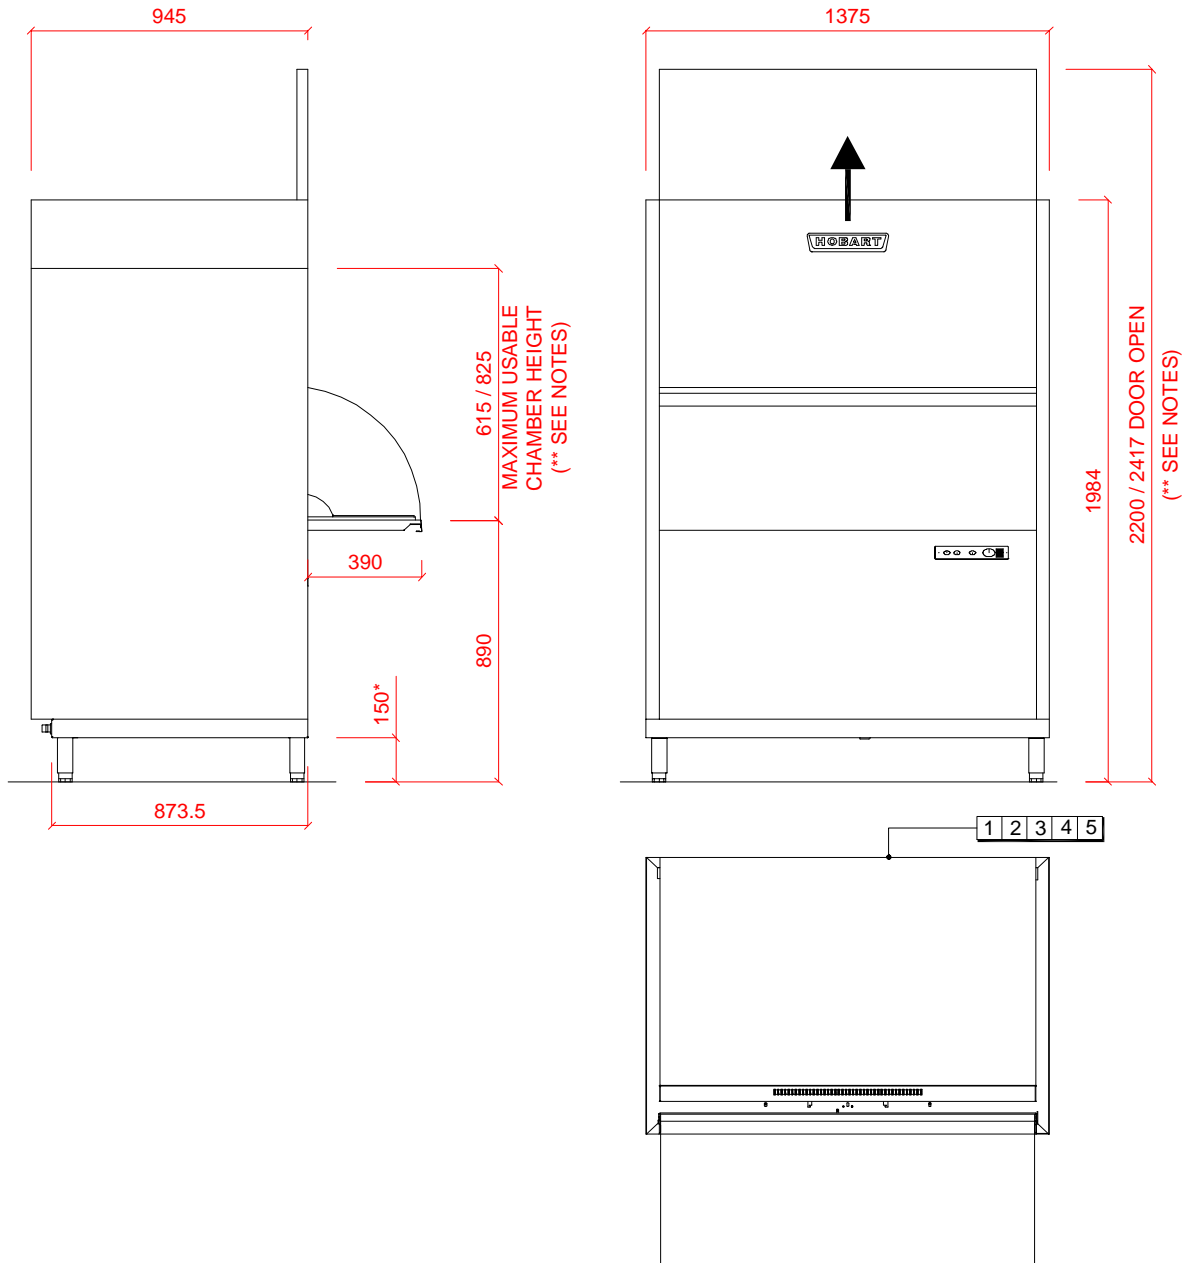

**1 Water**

22mm CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.

WATER SUPPLY 15°C TO 60°C (2° TO 8° CLARK MAX) @ 0.5 TO 10 BAR MAX.

INITIAL TANK FILL 130 LITRES.

RINSE WATER USAGE 8.0 LITRES PER CYCLE. MAX USAGE 240 LITRES PER HOUR.

OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.

WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.

**2 Drain**

DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 800mm A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.

**4 5 Other Services**

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.

DETERGENT HOSE - 2.5 METRE FLEXIBLE.

**3 Electric Loading**

21.6kW 400/50/3 + N + E FUSED AT 35AMPS. CONFIGURABLE TO FOR WARM WATER SUPPLY 15.7kW 400/50/3 + N + E FUSED AT 35AMPS.

MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.

**Notes**

**\*\* DOOR HEIGHT CAN BE REDUCED TO 2200mm BY ADJUSTING DOOR MECHANISM**

APPROX WEIGHTS:  
EMPTY: 305kg's  
HEIGHTS MARKED \* REPRESENT ±25mm